



SIP Video Intercom SI-11



SI-11 is our own developed latest video intercom based on SIP protocol. It has a 2-megapixel camera with infrared night, highlights acoustic clarity due to exclusive AI algorithm, which eliminates distracting background noise more than 90%.



AI noise algorithm



IP65



2 megapixels with automatic exposure




3W Amplifier



Support PoE

The SI-11 to installed in commercial buildings, hospitals, prisons, airport, railways, unattended parking and so on.

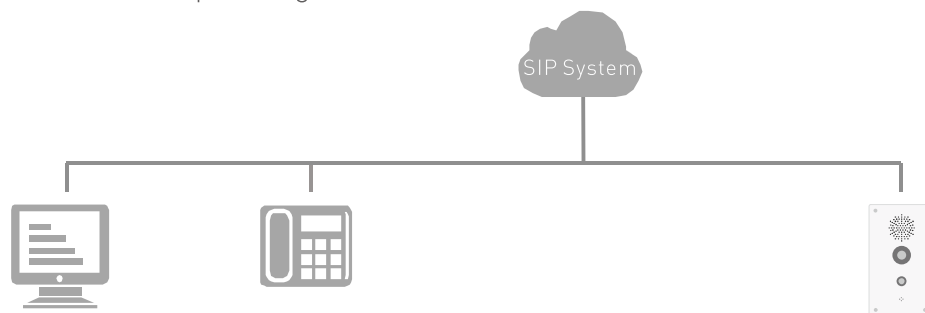

SIP Softphone

A-116V Video Phone

SI-11 SIP Video Intercom

Audio Specifications


	Protocol	SIP 2.0
Buttons	Material	Aluminium alloy
	Numeric keypad	Optional
Audio	Hands-free microphone	1
	On board power amplifier	3w
	Speaker	3w
	AI noise reduction	More than 90%
	Hands-free talk	Full-duplex
	Codec	G.711、 G.722、 GSM、 iLBC、 Speex
	Power	12V(+/- 15%)/2A DC or PoE
	PoE	PoE 802.3af (Class 1) 48V
Interface	Ethernet	10/100BASE-TX s Auto-MDIX, RJ-45
	Cable	CAT 5 Ethernet cable or higher
	Relay	2
Structural property	Housing material	Aluminum alloy cover, Metal base
	Operating temperature	-20°C to 70°C
	Working condition humidity	10% - 95%
	Storage temperature	-40°C to 70°C
	Installation	Flush mounting (embedded)
	Net weight	1.2kgs
	Size	L*W*H:185*114*38 mm
	Waterproof	IP65

Video Specifications


Video encoding	H.264
Camera	2 mega-pixel
Visual angle	90°
Night view	Support
Image resolution ratio	1280*720
Minimum light sensitivity	0.05 lux,0 lux with infrared compensation light
Maximum video frame rate	1280x720(30frames)



SI-10



SI-11

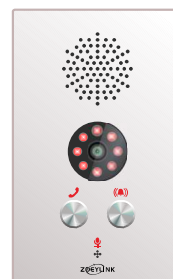

SI-21

LEARN MORE

For more information visit www.zoeylink.com

Zoeylink Innovation(Shenzhen) Co., Ltd.

Add: Room 503,5F,Building 6A,Wutong Industrial Park,Hangcheng Street,Bao'an District,Shenzhen.

Tel: +86 755 2312 1899 | E-mail: sales@zoeylink.com